

# iD Tilt

LUXURY VINYL TILES

Stylish.  
Durable.  
High-traffic  
ready

# Strong but graceful

Designed with durability in mind, iD Tilt thrives in **heavy traffic and commercial areas** making it perfect for shops and sports & wellness zones, but also an excellent choice for new builds and renovation projects.

This Luxury Vinyl Tile collection offers higher safety with an upgraded slip resistance and features a **surface treatment** to ease cleaning and maintenance. The reduced gap size between interlocking tiles provides a **seamless surface for an uninterrupted, flawless finish.**

With an array of designs in wood decors and other natural materials, iD Tilt answers the need for **modularity** within commercial environments.

At Tarkett, we are deeply committed to the benefits of local manufacturing in Europe, recognizing its significant contribution to producing superior quality products. Our **Made in Europe** iD Tilt underscores this approach in every aspect of our production, from shortening transportation distances to adopting eco-friendly practices, all aimed at reducing its environmental footprint.

iD Tilt is also **glue free** meaning a quick and easy installation, reducing the need for business downtime, and paving the way to better floors for generations to come. See how this range can add classic elegance or industrial chic to your project, letting you explore **endless modularity possibilities** without compromising on strength or aesthetic.



## LOWER EMISSIONS



Made in Europe

Now produced in Europe with a lower carbon footprint: less than 11 kg CO<sub>2</sub> eq/m<sup>2</sup>; 1 kg less than the previous collection (A1-A3)

## LESS WASTE



Made from 25% recycled content



Glue free installation means iD Tilt can be post-use recycled through our Restart<sup>®</sup> programme answering ISO 14021

## GREATER WELL-BEING



Ultra-low VOC emissions



Phthalate free

## MORE PROOF




We only use good materials and offer full transparency throughout our production process (details listed in our PhD)



Our Product Health Declaration provides fully transparent **evidence of the product's health credentials**

*The way to better floors.*

# Engineered to last

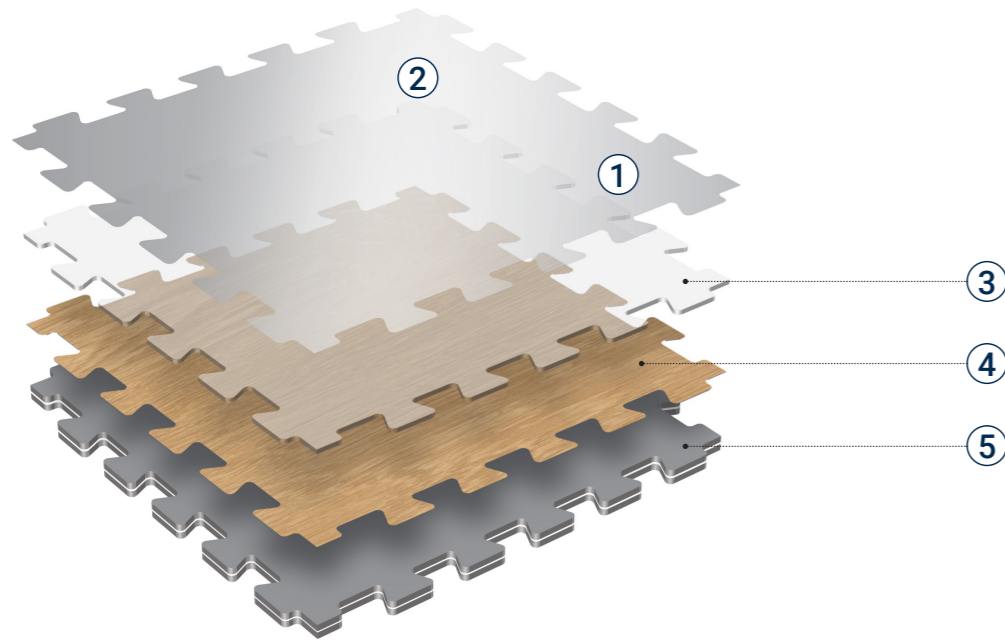

## ① TopClean XP™ PU COATING

Polyurethane coating to protect the floor from scratches and stains and increase durability.

## ② Top embossing

To achieve visual appeal with the look and feel of natural materials and reduce the risk of slips and falls in area prone to moisture with R10 slip-resistant rating.

## ③ Transparent wear layer

Enhances the texture of the design and significantly increases its resistance to wear and tear.

## ④ Printed film

High-definition printing technology to replicate natural materials such as wood or stone and achieve an authentic and natural appearance.

## ⑤ Double glass veils core layer

Higher quality engineered core layer provides structural integrity and dimensional stability to the LVT flooring.



## HIGH-TRAFFIC PERFORMANCE

iD Tilt is a robust flooring collection designed with a performant wear layer to resist scratches, scuffs, and stains, ensuring long-lasting **durability** in demanding commercial environments.

Thanks to the TopClean XP™ PU surface treatment and its reduced gap size between the interlockings, iD Tilt is also **easy to clean and maintain**, especially on joints.

With its enhanced R10 **slip resistance** and acoustic properties, iD Tilt flooring provides a reliable solution for **high-traffic areas**. Engineered to withstand the demands of manual forklifts, it boasts a dynamic load capacity of up to 600 kg and can handle static loads of up to 40 kg/cm<sup>2</sup>, ensuring safety and longevity in the most challenging environments.




## MODULAR DESIGN POSSIBILITIES

The iD Tilt collection presents an array of options which allow for versatile configurations to suit diverse floor layouts and preferences.

With an assortment of **natural décors**, wood, stone and concrete, you can effortlessly create settings and visually dynamic environments.

Whether seeking a cohesive aesthetic or a mix-and-match approach, we empower customers to unleash their creativity with a **customisation service** that can tailor flooring layouts to your specific branding.



## QUICK AND EASY INSTALLATION

The **glue-free locking system** offers quick and easy installation and exceptional dimensional stability, maintaining its integrity even under heavy loads, high traffic and fluctuating environmental conditions.

Helping to reduce business downtime\*, iD Tilt is a **valuable ally** in any construction project and renovation project.


\* 2 people can install up to 200 m<sup>2</sup> in 8 hours






## INTERLOCKING TILE SYSTEM


Whether your style leans towards classic **elegance** or industrial chic, our carefully curated selection has something to offer for every taste and setting. Explore the **endless possibilities** with iD Tilt and elevate your space with a perfect harmony of strength and sophistication.

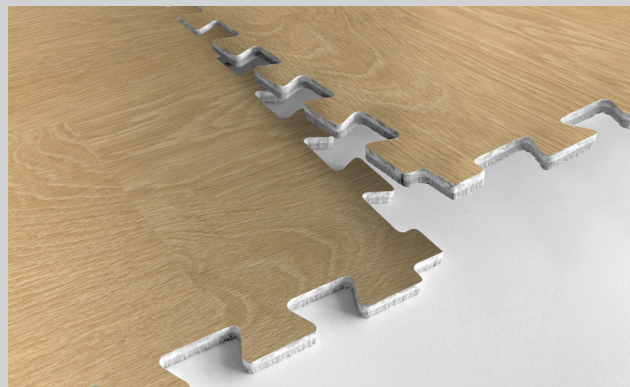

### Formats




66.4 x 66.4 cm



dovetail: 45 mm

# Design overview


## Polished Concrete




Indium | 280030001  
NCS S 3502-Y80R LRV: 31.26



Steel | 280030002  
NCS S 4502-Y80R LRV: 26.43




Cool Grey | 280030003  
NCS S 4502-Y80R LRV: 27.28



Dark Grey | 280030004  
NCS S 6502-Y20R LRV: 12.77

## Denver



Ashen | 280030005  
NCS S 5502-Y50R LRV: 17.63



Grey | 280030006  
NCS S 5005-B LRV: 20.39



Black | 280030007  
NCS S 6500 N LRV: 14.45



Blue | 280030008  
S 5010-R90B LRV: 17.48

## Oxide



Steel | 280030009  
NCS S 5502-Y20R LRV: 16.42

## Lime Oak



Golden | 280030010  
NCS S 3020-Y20R LRV: 29.7



Silver | 280030011  
NCS S 4005-Y LRV: 31.94


## POLISHED CONCRETE


Polished Concrete is a soft and light all-over mineral texture. It is available in two levels of subtle neutral greys. By creating pure and soft surfaces, this floor is an easy to combine solution that fits many trends and styles.

10 years  
GUARANTEE  
COMMERCIAL  
USE




Dimension:  
66.4 × 66.4 cm

Thickness:  
 5 mm

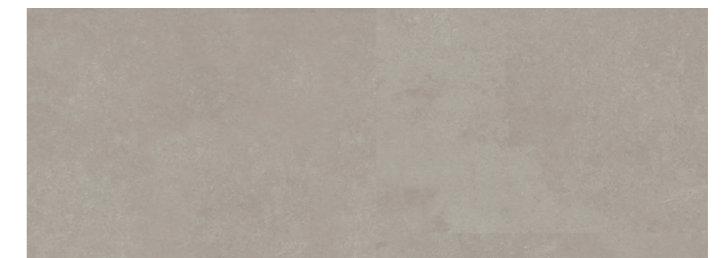

Indium | 280030001

LRV: 31.26%

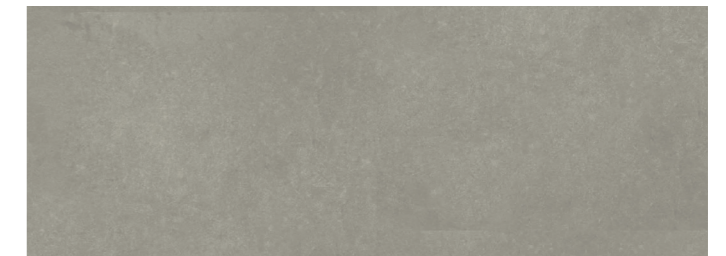

Steel | 280030002


LRV: 26.43%



## COMPOSITE

The classic and delicate medium grey structure of Composite allows for a realistic used concrete floor effect. Its two levels of cool grey tones make it the ideal candidate for stylish projects. This texture is the best choice to enhance the personality of your projects.


**10** years  
GUARANTEE  
COMMERCIAL  
USE



Dimension:

66.4 × 66.4 cm

Thickness:

 5 mm





Cool Grey | 280030003

LRV: 27.28%



Dark Grey | 280030004

LRV: 12.77%

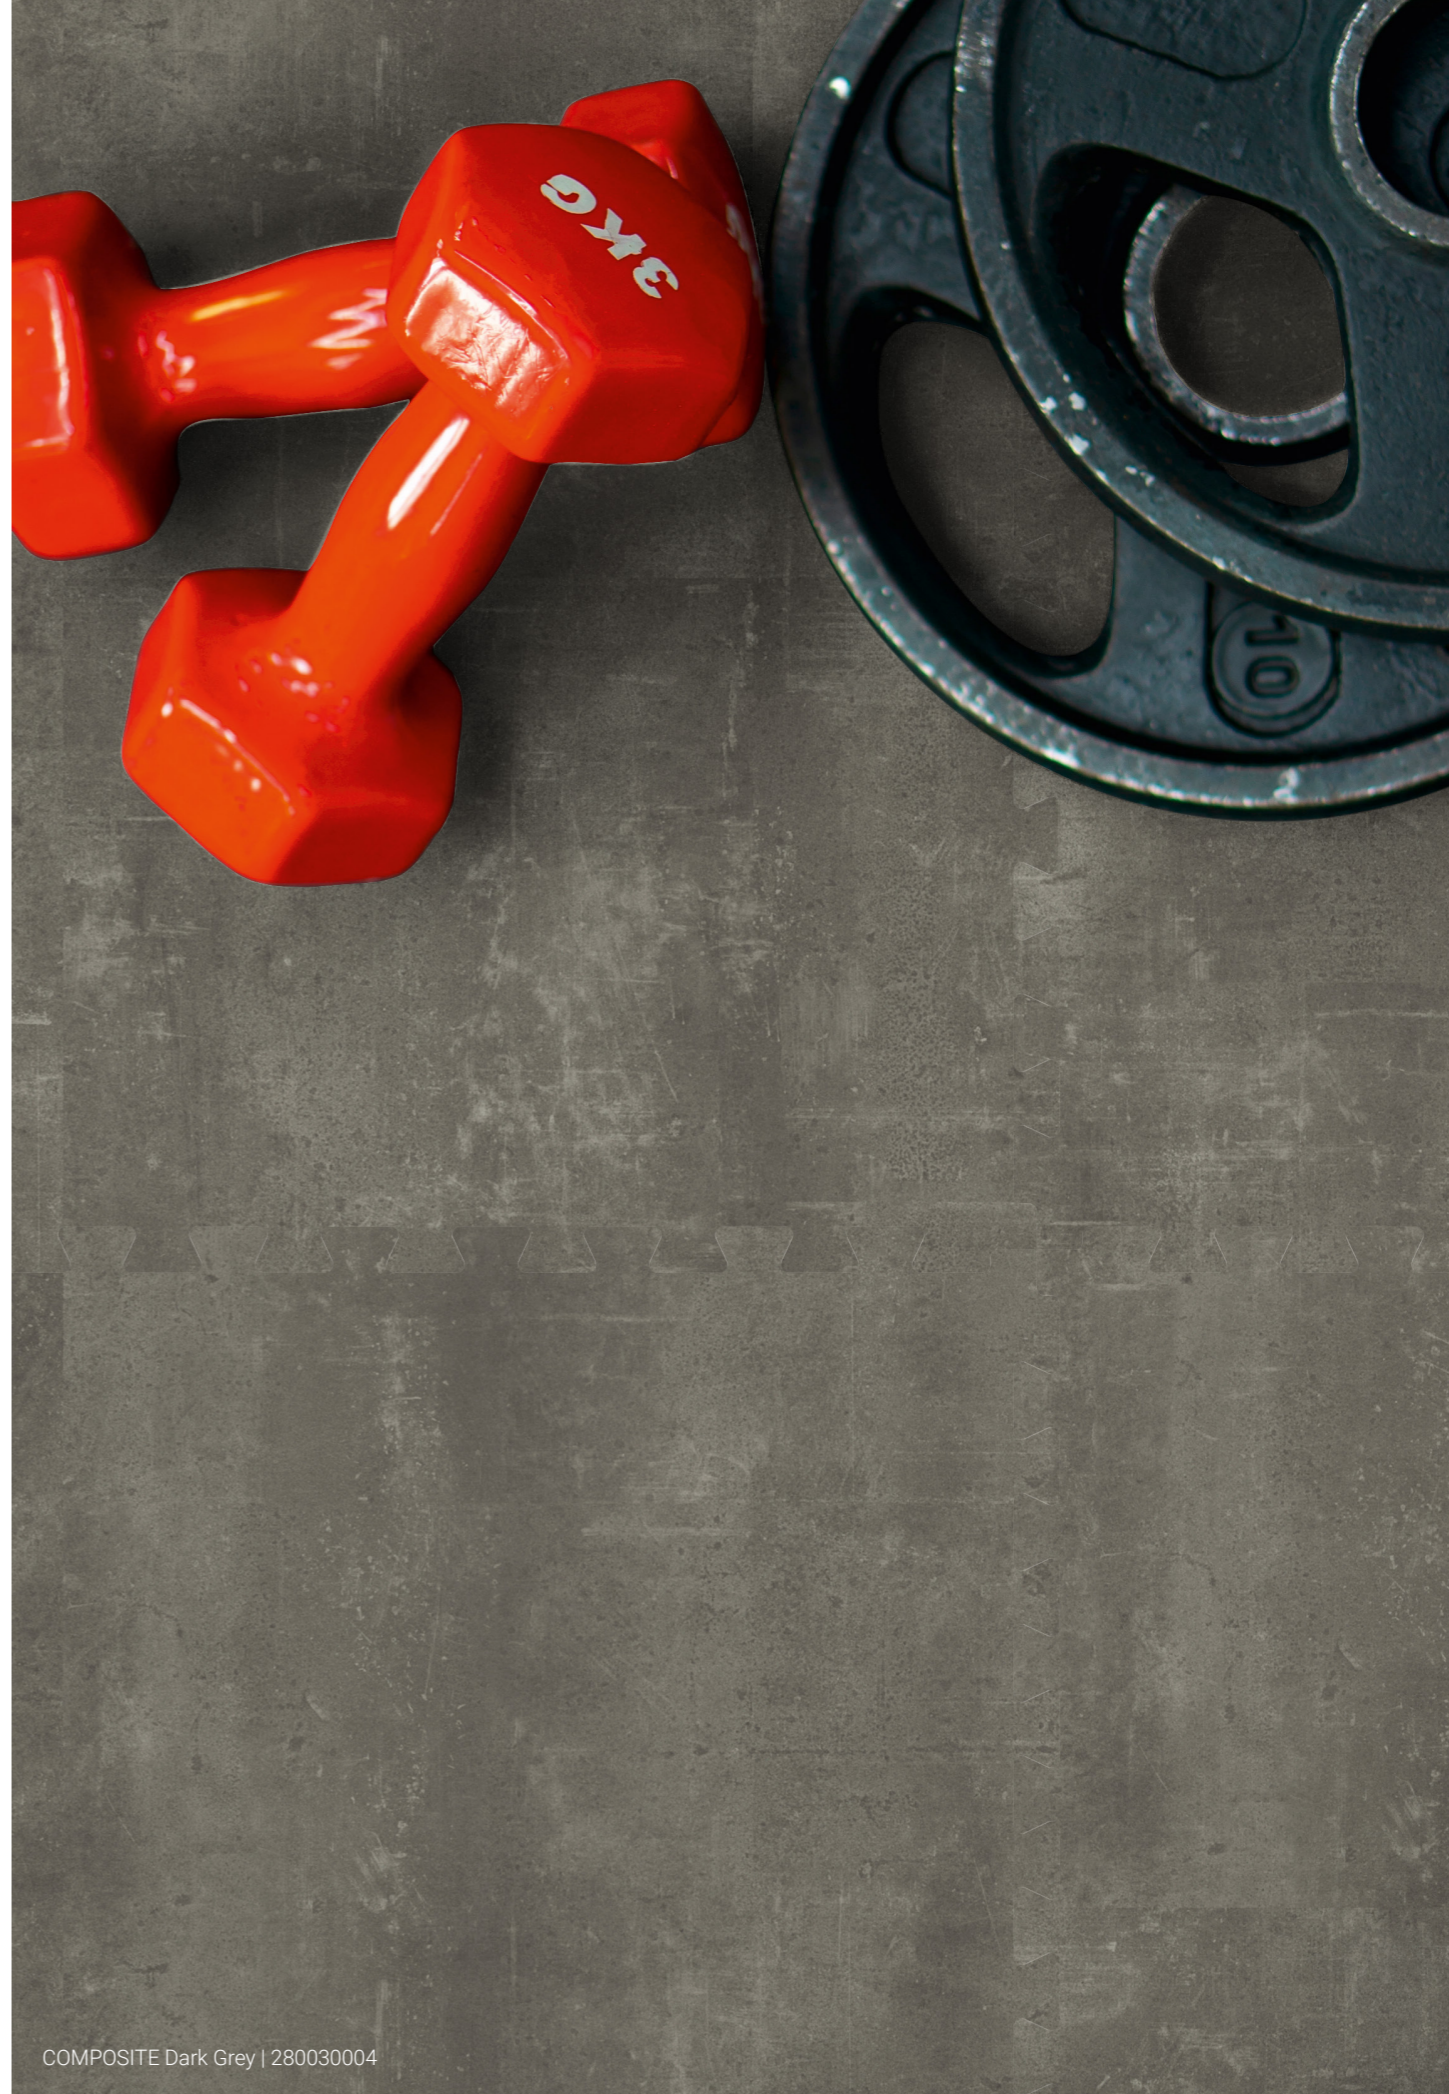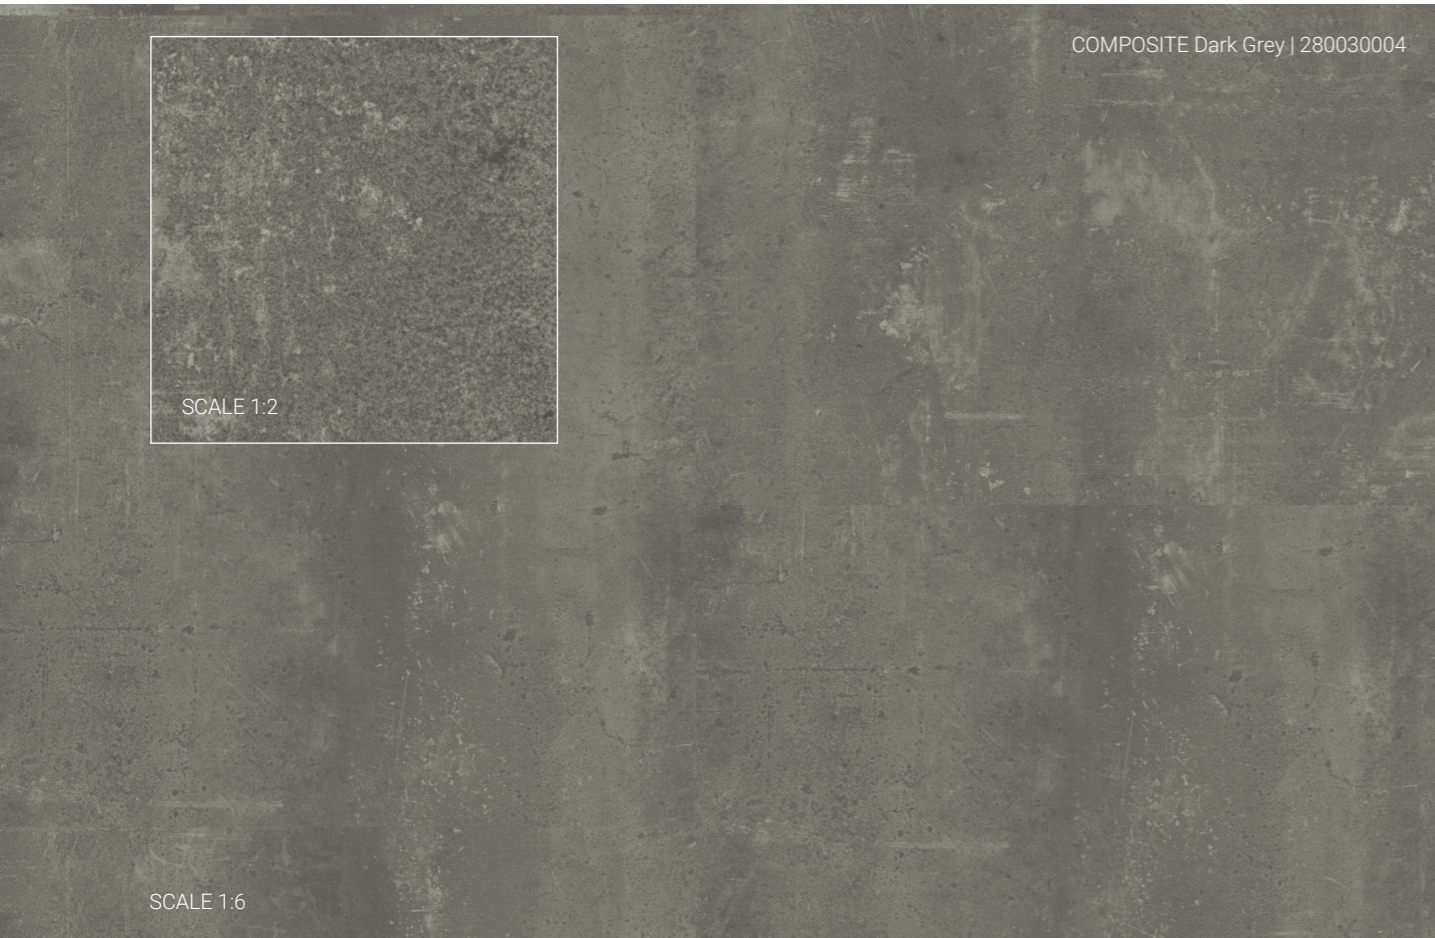

## DENVER

The delicate structure of Denver, a cross between terrazzo and rough concrete, gives your floors a distinctive identity. It comes in four color shades, from warm to cool grays, including a subtle blue.

10 years  
GUARANTEE  
COMMERCIAL  
USE




Dimension:

66.4 × 66.4 cm

Thickness:

5 mm

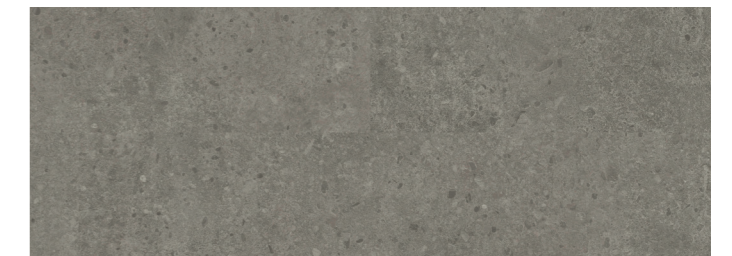


Ashen | 280030005

LRV: 17.63%




Grey | 280030006

LRV: 20.39%

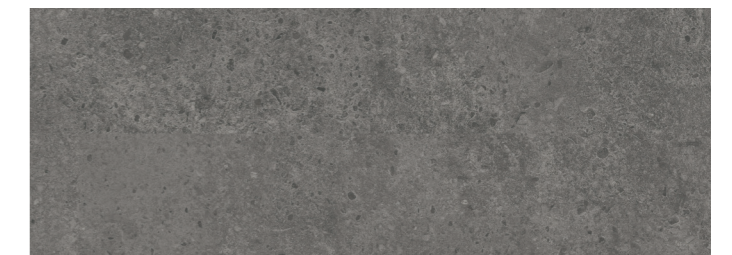


Black | 280030007

LRV: 14.45%

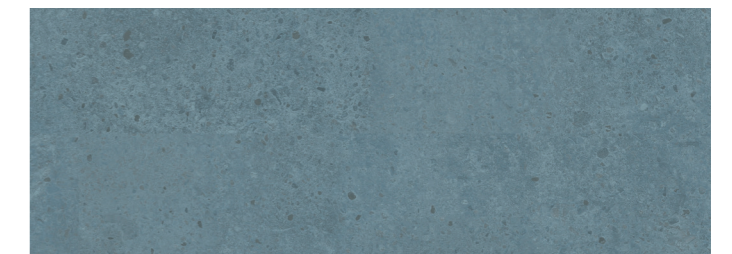

Blue | 280030008

LRV: 17.48%

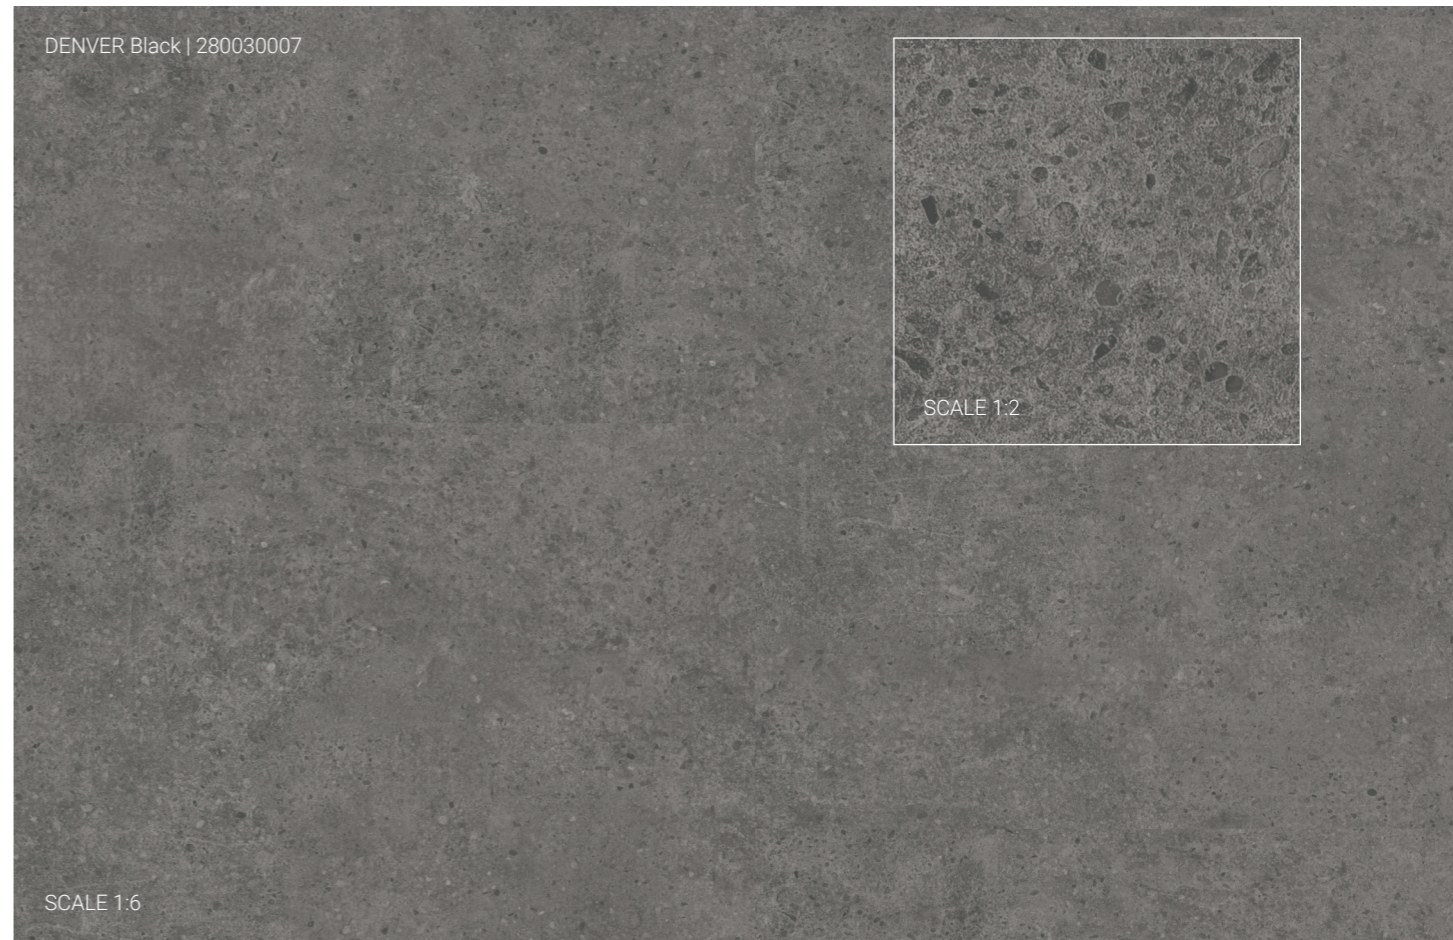

## LIME OAK

At once calm in gray and warm in natural colors. Lime Oak's sobriety makes it an all-purpose wood that adapts easily to any environment.

10  
years  
GUARANTEE  
COMMERCIAL  
USE



Dimension:  
66.4 x 66.4 cm

Thickness:  
 5 mm



Golden | 280030010

LRV: 29.70%



Silver | 280030011

LRV: 31.94%



# OXIDE

Alone, in combination with wood or concrete, each time Oxide leads us to a different metallic imaginary world.



Dimension:  
66.4 x 66.4 cm

Thickness:  
 5 mm



Steel | 280030009


LRV: 16.42%



# Accessories


## to ensure a perfect finish

With our modular Tarkett flooring solutions, you can seamlessly mix and match other Tarkett floorings and accessories to create a unique and functional space tailored to your specific needs.



### ALUMINIUM SKIRTING


- Aluminium 263994 002
- Size:** 250 cm length × 0.12 cm width × 10 cm height
- 📦 10 units (25 lm)



### TRANSITION PROFILE

Very high traffic aluminium transition profile, to be screwed in.


- Silver 1451 011
- Stainless Steel 1451 012
- Size:** 270 cm length × 2.5 cm width × 0.4–0.95 cm height
- 📦 Full kit including bottom & top profiles with screws. 10 units of 2.7 lm in a cardboard box = 27 lm



### BENDABLE PROFILE

Aluminium stop profile, to be screwed in.

- Silver 1456 011
- Stainless Steel 1456 012
- Size:** 250 cm length × 3 cm width × 0.8 cm height
- 📦 Full kit including stop profiles, screws and dowels. 10 units of 2.5 lm in a cardboard box = 25 lm



### RAMP PROFILE

Very heavy traffic aluminium profile, to be screwed in.

- Silver 1454 011
- Stainless Steel 1454 012
- Size:** 270 cm length × 3.8 cm width × 0.5–0.7 cm height
- 📦 Full kit including ramp profile and screws. 10 units of 2.7 lm in a cardboard box = 27 lm

Classification	Norm	Tarkett value
<b>Product type</b>	EN ISO 10582	Heterogeneous poly (vinyl chloride) floor coverings
<b>Domestic classification</b>	EN ISO 10874	23 Heavy
<b>Commercial classification</b>	EN ISO 10874	34 Very heavy
<b>Industrial classification</b>	EN ISO 10874	43 Heavy
Technical characteristics	Norm	Tarkett value
<b>Total thickness</b>	EN ISO 24346	5 mm
<b>Wear layer thickness</b>	EN ISO 24340	0.70 mm
<b>Total weight</b>	EN ISO 23997	8500 g/m <sup>2</sup>
<b>Binder content</b>	EN ISO 10582	Type I
<b>Surface treatment</b>		TopClean XP®
<b>Bevelled edges</b>		No bevel
<b>Installation method</b>		Interlocking
Performances for CE marking	Norm	Tarkett value
<b>Declaration of Performance</b>	EN 14041	0197-0016-DoP-2024-02
Technical performances	Norm	Tarkett value
<b>Dimensional stability</b>	EN ISO 23999	Average measured value: ≤ 0.10 %
<b>Curl resultant to heat</b>	EN ISO 23999	≤  1  mm
<b>Reaction to fire</b>	EN 13501-1	B <sub>f1</sub> s1
<b>Residual indentation</b>	EN ISO 24343-1	Required value: ≤ 0.10 mm
<b>Furniture leg</b>	EN ISO 16581	No damage
<b>Castor chair</b>	EN ISO 4918	No damage
<b>Impact sound reduction – ΔLw</b>	EN ISO 717-2	5 dB
<b>Thermal resistance</b>	EN ISO 10456	0.05 m <sup>2</sup> · K/W
<b>Colour fastness to light</b>	EN ISO 105-B02	≥ 6
<b>Chemical resistance</b>	EN ISO 26987	Good resistance
<b>Slip resistance</b>	DIN 51130	R10
<b>Peeling resistance</b>	EN ISO 24345	≥ 50 N / 50 mm
<b>Underfloor heating</b>		Suitable (subfloor temperature maximum 27°C)
Sustainability performances	Norm	Tarkett value
<b>Recyclability through ReStart®</b>		Recyclable
<b>Recycled content</b>		25%
<b>Carbon footprint (Cradle-to-Gate, EPD Modules A1-A3)</b>		10.86 kg CO <sub>2</sub> eq/m <sup>2</sup>
<b>Total VOC emissions</b>	EN 16516	Platinum ≤ 10 µg/m <sup>3</sup>
Dimensions and designs	Norm	Tarkett value
<b>Tile</b>		664 × 664 mm – 4 tiles = 1.63 m <sup>2</sup> per box – 54 boxes per pallet
<b>Number of designs available</b>		11

The above information is subject to modification for the benefit of further improvement. (06/24).

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website [www.tarkett.com](http://www.tarkett.com). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.





■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH - Tel. +43 1 716 440 ■ Belgium: Tarkett Belux Sprl - Tel. +32 52 26 24 11 ■ Denmark: Tarkett A/S - Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy - Tel. +358 9 4257 9000 ■ France: Tarkett SAS - Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH - Tel. +49 621 68172 300 ■ Greece: Tarkett Monoprosopl Ltd - Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. - Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 ■ Netherlands: Tarkett BV - Tel. +31 416 685 491 ■ Norway: Tarkett AS - Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA - Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. - Tel. +34 914 951 400 ■ Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH - Tel. +41 43 233 79 24 ■ Turkey: Tarkett Turkey - Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Estonia: Tel. +372 55 515880 ■ Latvia: Tel. +371 26 112014 ■ Lithuania: Tel. +370 37 262220 ■ Czech Republic: Tarkett org. slozka - Tel. +420 271 001 600 ■ Hungary: Tarkett Polska Sp z o.o. magyarországi fióktelepe - Tel. +36 1 437 8150 ■ Kazakhstan: Tarkett Kazakhstan - Tel. +7 7172 79 00 99 ■ Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 ■ Russian Federation: ZA0 Tarkett RUS - Tel. +7 495 775 3737 ■ Slovakia: Tarkett Polska Sp. z o.o. organizačná zložka - Tel. +421 2 48291 317 ■ South East Europe: Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA - Tel. +38 (0) 44 35 45 621 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 ■ India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 - New Delhi - Tel. +91 11 4352 4073 - Mumbai - Tel. +91 22 2648 8750 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett Brasil: Tel. +55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett Latam - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Mexico - Tel. +55 11 98410 9310

Designs and photos used in this brochure are for illustration purposes only. Images are not contractual images and do not stand for product recommendation. Due to evolution of standards, characteristics indicated in the text and images are not binding only after confirmation by our departments.

Design: Tarkett Internal Agency / Photos & 3D: 3DStudio - Shutterstock  
professionals.tarkett.com

